

RIOCN8WS


Plug-in Receiver



Total safety today is also wireless

- Control card for managing, via radio, maximum 10, RIO wireless accessories. It connects to automation control boards or control panels, fitted with the corresponding connector or slot.

Dimensions (mm)

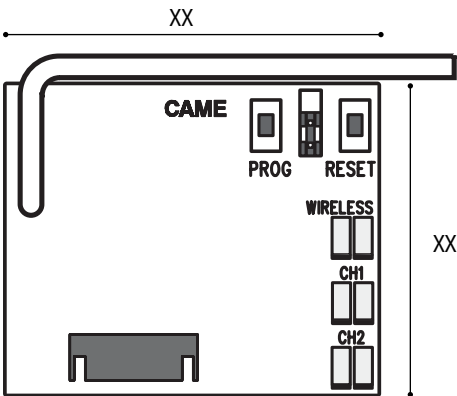

Main features

- Antenna
- Programming button
- Radio power selector dBm (L=5 / H=10)
- RESET button
- Alert LED
- Card slot

Operational limits

MODELS	806SS-0040
Max. range of radio (m)	30
Max range of infrared beam (m)	-

Technical characteristics

MODELS	806SS-0040
Protection rating (IP)	-
Power supply (V)	5
Radio signal frequency (Mhz)	868,95
Batteries	-
Battery capacity (mAh)	-
Max. absorption (mA)	25
Absorption while transmitting (mA)	-
Stand-by absorption (µA)	-
Max. rating of 24 V (A) relay contacts	-
Operating temperature (°C)	-20 ÷ +55
Material	-